

# RECESSED CANOPY

## 120V installation



COVER PLATE A01



COVER PLATE C03



COVER PLATE B01

A low-voltage lighting fixture requires the use of a power supply (driver) to be powered. This requires the use of a significant canopy size that can be quite imposing on an aesthetic point of view. To reduce its footprint and streamline visual impact we offer the use of a recessed canopy for some of our models. In short, the power supply is concealed in the ceiling offering a refined look and emphasizing the attention on the fixture's design.

|                        |  |
|------------------------|--|
| <b>TYPE</b>            | Recessed canopy  |
| <b>APPLICABLE WITH</b> | Mile collection<br>Clark 02<br>Dorval 05<br>Sainte collection<br>Silo collection   |
| <b>CONSTRUCTION</b>    | Powder coated steel and aluminum body<br>Powder coated steel cover plate   |
| <b>INSTALLATION</b>    | For non-insulated hollow ceiling   |
| <b>WEIGHT</b>          | max. 2.2 lb / 1 kg (including cover plate)   |
| <b>CERTIFICATIONS</b>  |   IP20 |
| <b>WARRANTY</b>        | 2 years  |

## WARNING


Not all ceilings can host a recessed canopy as it requires clearance above the ceiling. Please consult the drawings below.

\* Can be mounted on slanted ceilings (max 45 °)

## RECESSED CANOPY - CHECK LIST

- Must be installed in a non-insulated ceiling.
- Confirm you have the required clearance in the ceiling plenum. (See drawing below)
- Respect min and max ceiling thickness. (See drawing below)
- The hole size for installation is 4 1/8" / 10.5 cm

## RECESSED CANOPY WITH AUXILIARY BOX

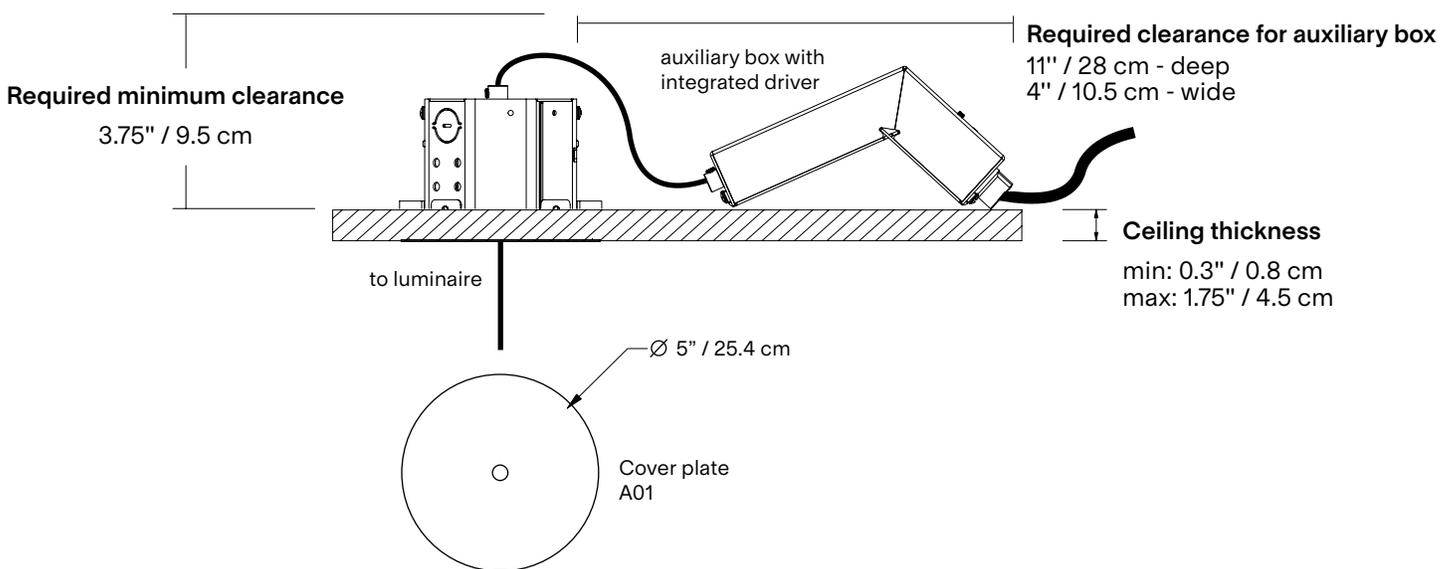

\*dimensions are approximate and may vary slightly

## WARNING


Not all ceilings can host a recessed canopy as it requires clearance above the ceiling. Please consult the drawings below.

\* Can be mounted on slanted ceilings (max 45 °)

## RECESSED CANOPY - CHECK LIST

- Must be installed in a non-insulated ceiling.
- Confirm you have the required clearance in the ceiling plenum. (See drawing below)
- Respect min and max ceiling thickness. (See drawing below)
- The hole size for installation is 4 1/8" / 10.5 cm

## RECESSED CANOPY WITH REMOTE DRIVER

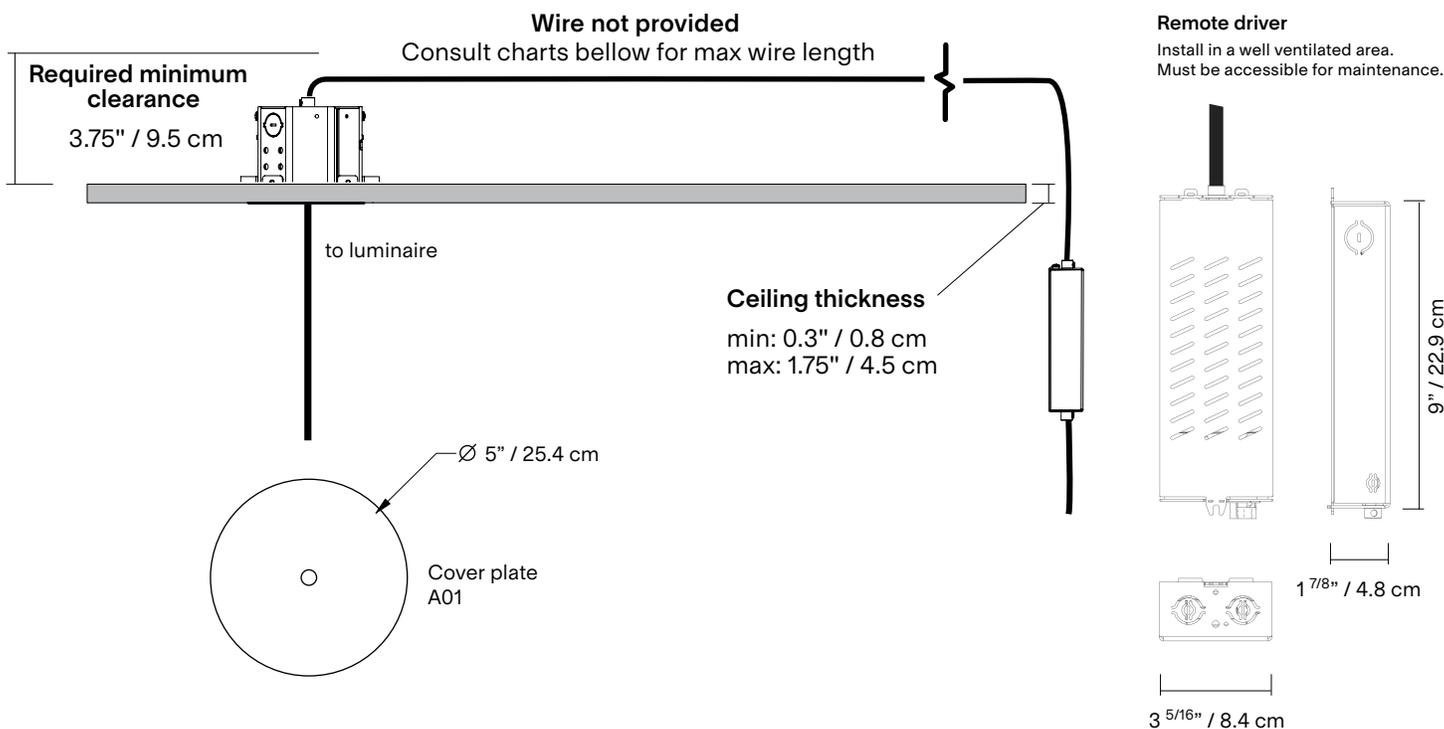

Distance between lamp and driver.

### MILE, CLARK 02, DORVAL 05

| Wire gauge | Max Distance     |
|------------|------------------|
| 18AWG      | 64.6 ft / 19.7m  |
| 16AWG      | 102.7 ft / 31.3m |
| 14AWG      | 163.3 ft / 49.8m |
| 12AWG      | 259.7 ft / 79.1m |

### SAINTE

| Wire gauge | Max Distance      |
|------------|-------------------|
| 18AWG      | 131.3 ft / 40m    |
| 16AWG      | 208.8 ft / 63.7m  |
| 14AWG      | 332.1 ft / 101.2m |
| 12AWG      | 528.1 ft / 161m   |

### SILO


| Wire gauge | Max Distance     |
|------------|------------------|
| 18AWG      | 34.4 ft / 10.5m  |
| 16AWG      | 54.7 ft / 16.7m  |
| 14AWG      | 86.9 ft / 26.5m  |
| 12AWG      | 138.2 ft / 42.1m |

\*dimensions are approximate and may vary slightly

## COVER PLATE FINISH



## PRODUCT ANATOMY

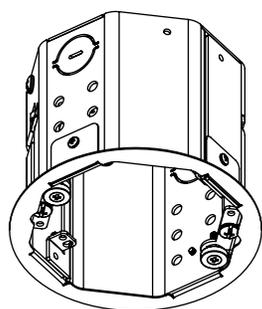

## COVER PLATE

Mile collection, Clark 02 and Dorval 05  
**A01**



Sainte collection  
STE 01 to 05, 21 to 25  
**B01**



STE 06 to 09  
**B02**



Silo collection  
SIL 2S, 3S, 4S  
**C01**



SIL 10, 11  
**C02**



SIL 12  
**C03**



SIL 13  
**C04**



SIL 14  
**C05**



|                          |  | Example          | Fill with your selection |
|--------------------------|--|------------------|--------------------------|
| <b>INSTALLATION TYPE</b> | <b>RC</b> Recessed canopy with auxiliary box<br><b>RM</b> Recessed canopy with remote driver   | <b>RC</b>        |                          |
| <b>COVER PLATE MODEL</b> | <b>A01</b> Mile collection, Clark 02, Dorval 05<br><b>B01</b> Sainte 01-05, 21-25<br><b>B02</b> Sainte 06-09<br><b>C01</b> Silo 2S, 3S, 4S<br><b>C02</b> Silo 10, 11<br><b>C03</b> Silo 12<br><b>C04</b> Silo 13<br><b>C05</b> Silo 14 | <b>A01</b>       |                          |
| <b>FINISH</b>            | <b>BK</b> Textured black<br><b>WH</b> Textured white<br><b>CC</b> Custom colour*   | <b>BK</b>        |                          |
| <b>DIMMING</b>           | <b>ZT</b> 0-10V<br><b>PH</b> Phase dimming   | <b>ZT</b>        |                          |
| <b>FULL SKU</b>          |  | <b>RCA01BKZT</b> |                          |
|                          |  | <b>NOTES</b>     |                          |

\*Custom colour available upon request. Material library on website.

# ORDERING NOTICE

## SIGNATURE NEEDED

# AVIS DE COMMANDE

## SIGNATURE REQUISE

By signing the Ordering Notice, the Purchaser acknowledges having read, understood, and agreed to the Product's specifications and limitations as set forth on pages 2 and 3 of the Recessed canopy specification sheet. The Purchaser understands that the product cannot be reimbursed nor exchanged (final sale), unless the Product has a manufacturing defect, in which case the Product will be subject to Lambert &Fils' standard Terms and Conditions, as stated on our website.

[Terms and conditions](#)

En signant l'Avis de Commande, l'Acheteur reconnaît avoir lu, compris et accepté les spécifications et limitations du Produit telles qu'énoncées aux pages 2 et 3 de la fiche technique du Pavillon encastré (Recessed canopy). L'Acheteur comprend que le produit ne peut être remboursé ni échangé (vente finale), à moins que le Produit présente un défaut de fabrication. Dans ce cas, le Produit sera soumis aux Conditions Générales standards de Lambert &Fils, telles qu'indiquées sur notre site Internet.

[Conditions générales](#)

---

signature

---

date