

RECESSED CANOPY

220-240V installation



COVER PLATE A01



COVER PLATE C03



COVER PLATE B01

A low-voltage lighting fixture requires the use of a power supply (driver) to be powered. This requires the use of a significant canopy size that can be quite imposing on an aesthetic point of view. To reduce its footprint and streamline visual impact we offer the use of a recessed canopy for some of our models. In short, the power supply is concealed in the ceiling offering a refined look and emphasizing the attention on the fixture's design.

TYPE	Recessed canopy
APPLICABLE WITH	Mile collection Clark 02 Dorval 05 Sainte collection Silo collection
CONSTRUCTION	Powder coated steel and aluminum body Powder coated steel cover plate
INSTALLATION	For non-insulated hollow ceiling
WEIGHT	max. 2.2 lb / 1 kg (including cover plate)
CERTIFICATIONS	CE UK RoHS IP20
WARRANTY	2 years

WARNING


Not all ceilings can host a recessed canopy as it requires clearance above the ceiling. Please consult the drawings below.

* Can be mounted on slanted ceilings (max 45 °)

RECESSED CANOPY - CHECK LIST

- Must be installed in a non-insulated ceiling.
- Confirm you have the required clearance in the ceiling plenum. (See drawing below)
- Respect min and max ceiling thickness. (See drawing below)
- The hole size for installation is 4 1/8" / 10.5 cm

RECESSED CANOPY WITH INDEPENDENT DRIVER

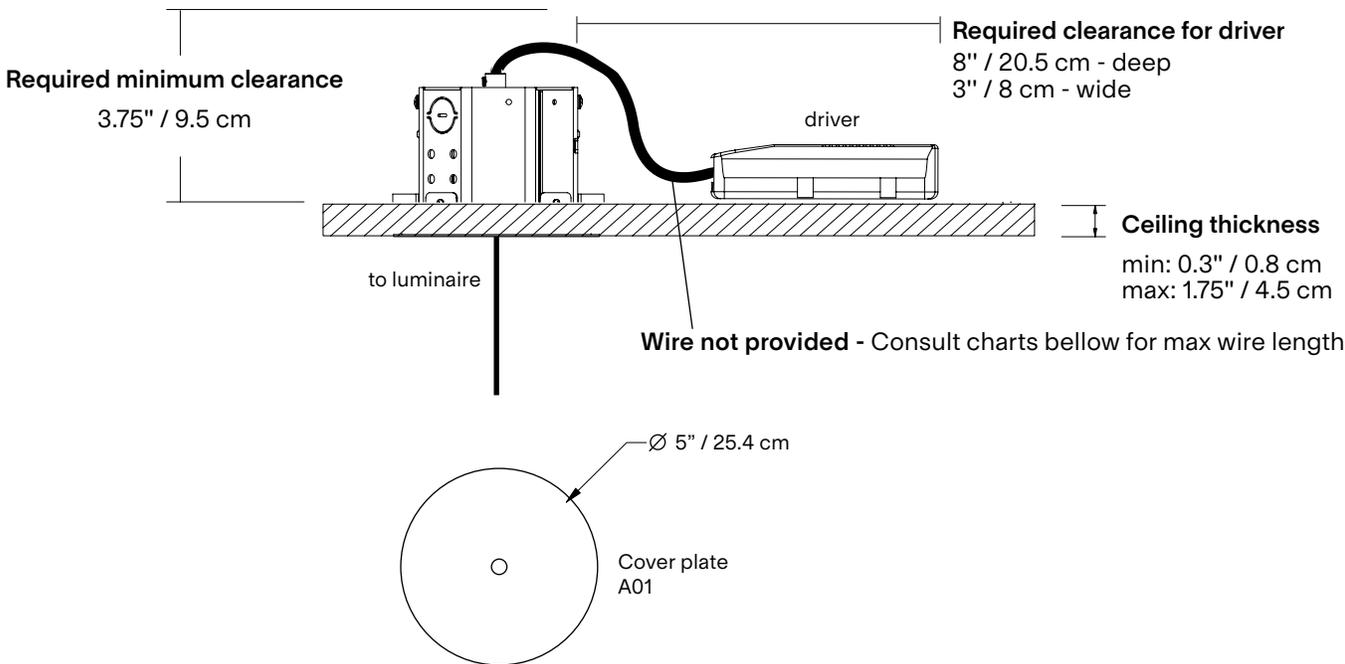

Distance between lamp and driver.

MILE, CLARK 02, DORVAL 05.

Wire gauge	Max Distance
18AWG	64.6 ft / 19.7m
16AWG	102.7 ft / 31.3m
14AWG	163.3 ft / 49.8m
12AWG	259.7 ft / 79.1m

SAINTE

Wire gauge	Max Distance
18AWG	131.3 ft / 40m
16AWG	208.8 ft / 63.7m
14AWG	332.1 ft / 101.2m
12AWG	528.1 ft / 161m

SILO

Wire gauge	Max Distance
18AWG	34.4 ft / 10.5m
16AWG	54.7 ft / 16.7m
14AWG	86.9 ft / 26.5m
12AWG	138.2 ft / 42.1m

*dimensions are approximate and may vary slightly

COVER PLATE FINISH




BK
Textured
black




WH
Textured
white

PRODUCT ANATOMY

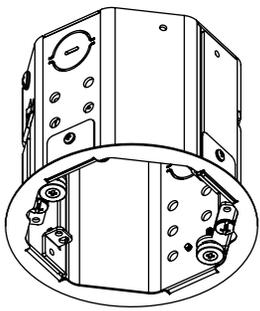

COVER PLATE

Mile collection, Clark 02 and Dorval 05
A01




Sainte collection
STE 01 to 05, 21 to 25
B01



STE 06 to 09
B02



Silo collection
SIL 2S, 3S, 4S
C01



SIL 10, 11
C02




SIL 12
C03



SIL 13
C04



SIL 14
C05



		Example	Fill with your selection
INSTALLATION TYPE	RC Recessed canopy	RC	RC
COVER PLATE MODEL	A01 Mile collection, Clark 02, Dorval 05 B01 Sainte 01-05, 21-25 B02 Sainte 06-09 C01 Silo 2S, 3S, 4S C02 Silo 10, 11 C03 Silo 12 C04 Silo 13 C05 Silo 14	A01	
FINISH	BK Textured black WH Textured white CC Custom colour*	BK	
DIMMING	PH Phase dimming DA DALI	PH	
FULL SKU		RCA01BKPH	
		NOTES	

*Custom colour available upon request. Material library on website.

ORDERING NOTICE

SIGNATURE NEEDED

AVIS DE COMMANDE

SIGNATURE REQUISE

By signing the Ordering Notice, the Purchaser acknowledges having read, understood, and agreed to the Product's specifications and limitations as set forth on page 2 of the Recessed canopy specification sheet. The Purchaser understands that the product cannot be reimbursed nor exchanged (final sale), unless the Product has a manufacturing defect, in which case the Product will be subject to Lambert & Fils' standard Terms and Conditions, as stated on our website.

[Terms and conditions](#)

En signant l'Avis de Commande, l'Acheteur reconnaît avoir lu, compris et accepté les spécifications et limitations du Produit telles qu'énoncées aux pages 2 de la fiche technique du Pavillon encastré (Recessed canopy). L'Acheteur comprend que le produit ne peut être remboursé ni échangé (vente finale), à moins que le Produit présente un défaut de fabrication. Dans ce cas, le Produit sera soumis aux Conditions Générales de Lambert & Fils, telles qu'indiquées sur notre site Internet.

[Conditions générales](#)

signature

date