






# Isle 14



An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.

TYPE	Suspension
CONSTRUCTION	Frosted glass tube Polished aluminum or marble block Polished aluminum endcap, canopy and anchors Polyester cord
SPECIFICATIONS	Power consumption: 52W  Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K  Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
CORD LENGTH	Mains/line cords- 120" / 304 cm Non-electrical cords- 96" / 244 cm
WEIGHT	ISL03B- 20.5lb / 9.3Kg ISL02B- 16.5lb / 7.5Kg ISL01B- 12lb / 5.4Kg
CERTIFICATIONS	     IP20
WARRANTY	2 years

## ISLE 14 - COLOUR PALETTE 1


ISL03B: Black Marquina + Polished Aluminum + Black Marquina + Polished Aluminum  
ISL02B: Polished Aluminum + Black Marquina + Polished Aluminum  
ISL01B: Polished Aluminum + Black Marquina

NOTES


- Luminaire total height (ceiling to lowest point of luminaire)  
Min - 29"/74 cm  
Max - 119"/302 cm
- If the position of the canopy is different from the proposed installation. Ceiling anchors can be used as junction boxes for daisy chain.

Contact Lambert et Fils:

- For any height outside standard parameters.
- For installation on slanted ceiling.
- For daisy chain installation.

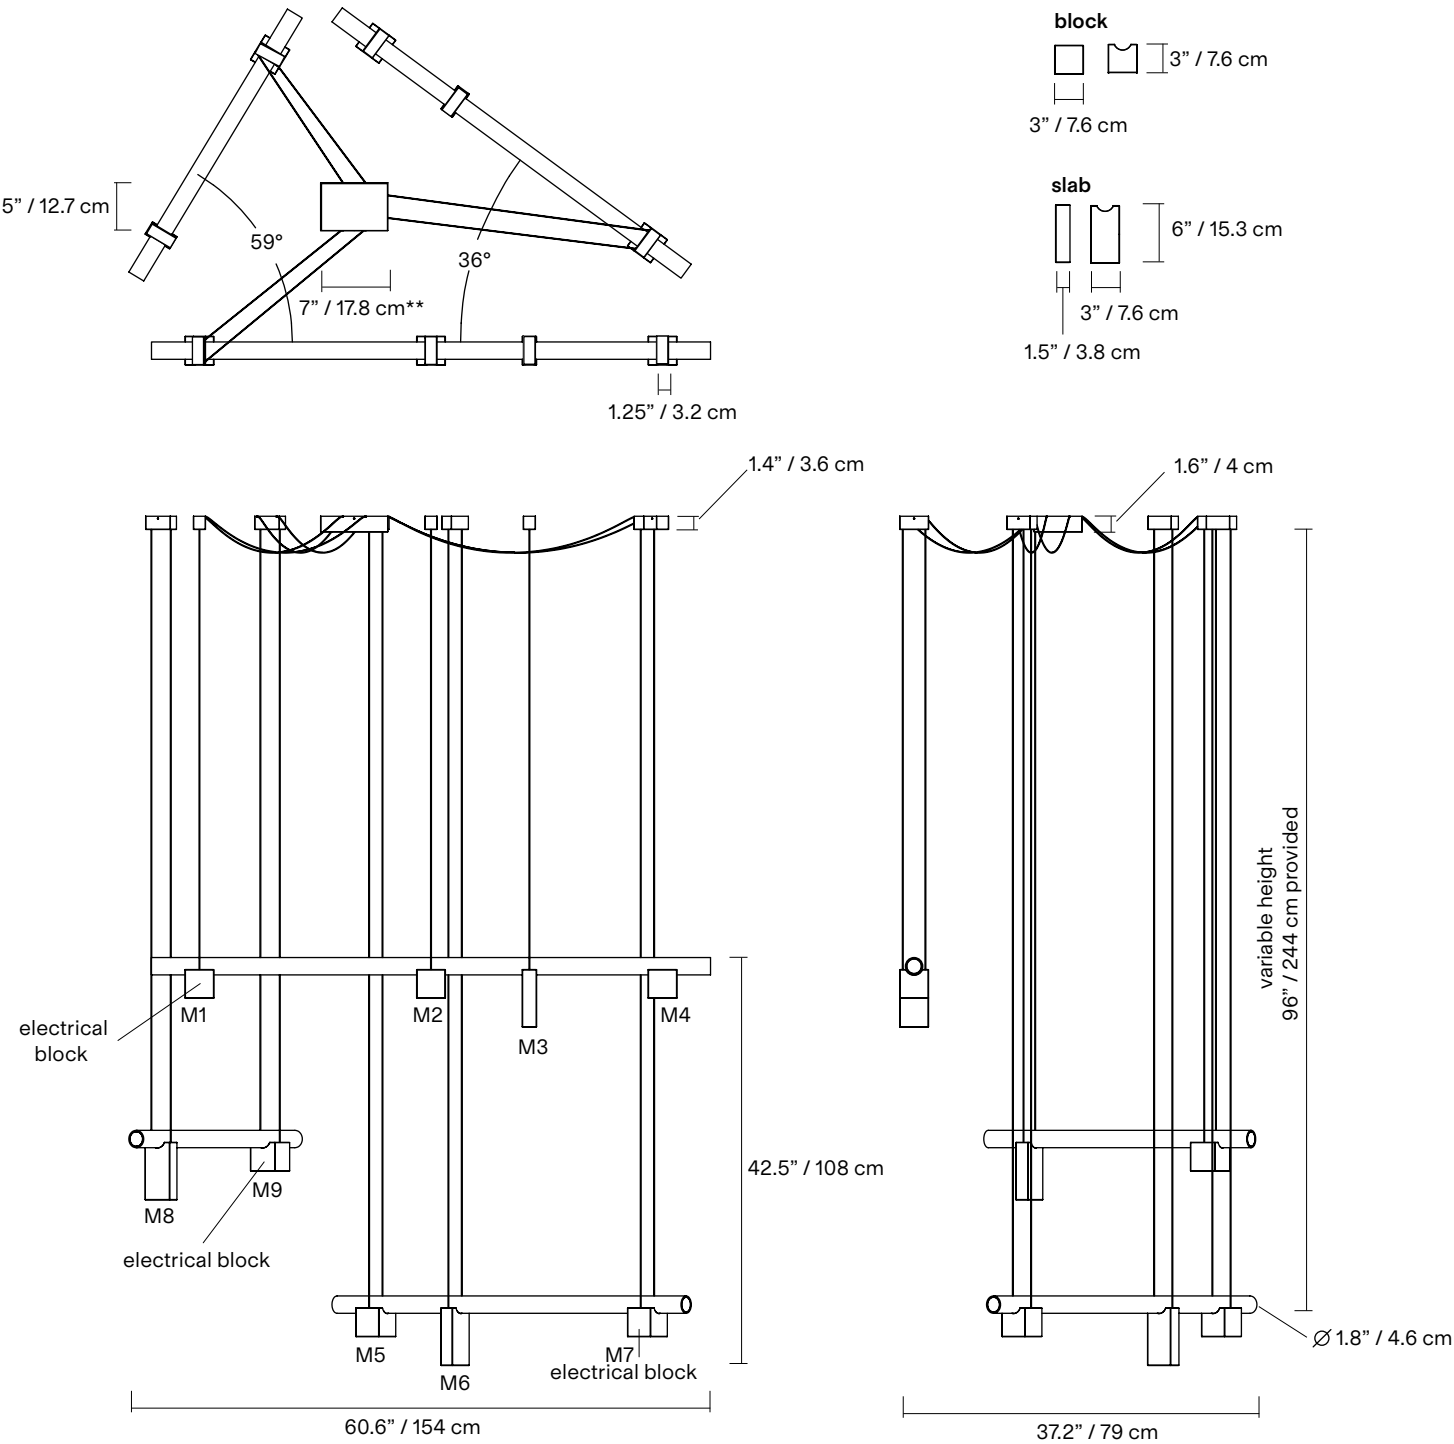


SM- Surface mounted

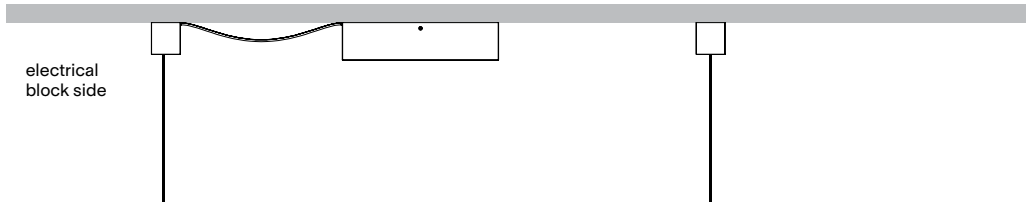

DC- Daisy chain



RM-Remote driver

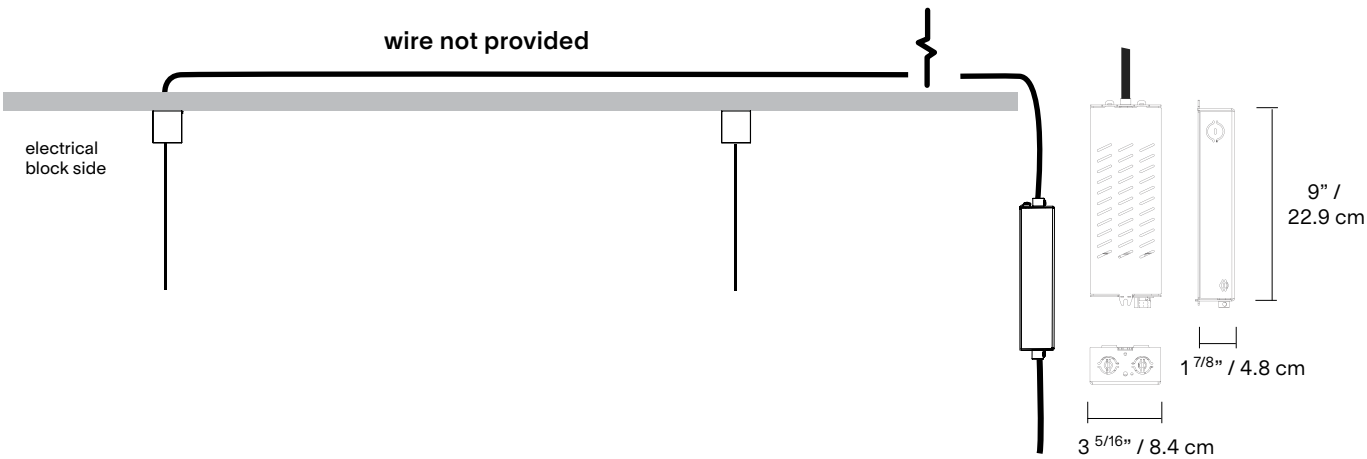

\*housing not necessary for  
Phase Dimming 220-240VAC  
(only driver provided)

REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.


GAUGE

18AWG (0.75mm<sup>2</sup>)  
16AWG (1.5mm<sup>2</sup>)  
14AWG (2.5mm<sup>2</sup>)  
12AWG (4mm<sup>2</sup>)


MAX ALLOWABLE DISTANCE

85 ft. / (26 m)  
136 ft. / (41 m)  
216 ft. / (66 m)  
343 ft. / (105 m)


MATERIAL\*




**AL**  
Polished  
aluminum




**BM**  
Black  
Marquina  
marble




**GU**  
Guatemala  
Green  
marble



**PI**  
Pink  
Portugal  
marble



**RL**  
Red  
Levanto  
marble



**RN**  
Red  
Negrais  
marble


CORD




**BK**  
Black

MOUNTING


**SM**  
Surface mounted



**DC**  
Daisy chain  
(only for Isle 03B)




**RM**  
Remote Driver



NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions
- \*All marble colours and vein patterns are unique to each block.

LAMP ANATOMY

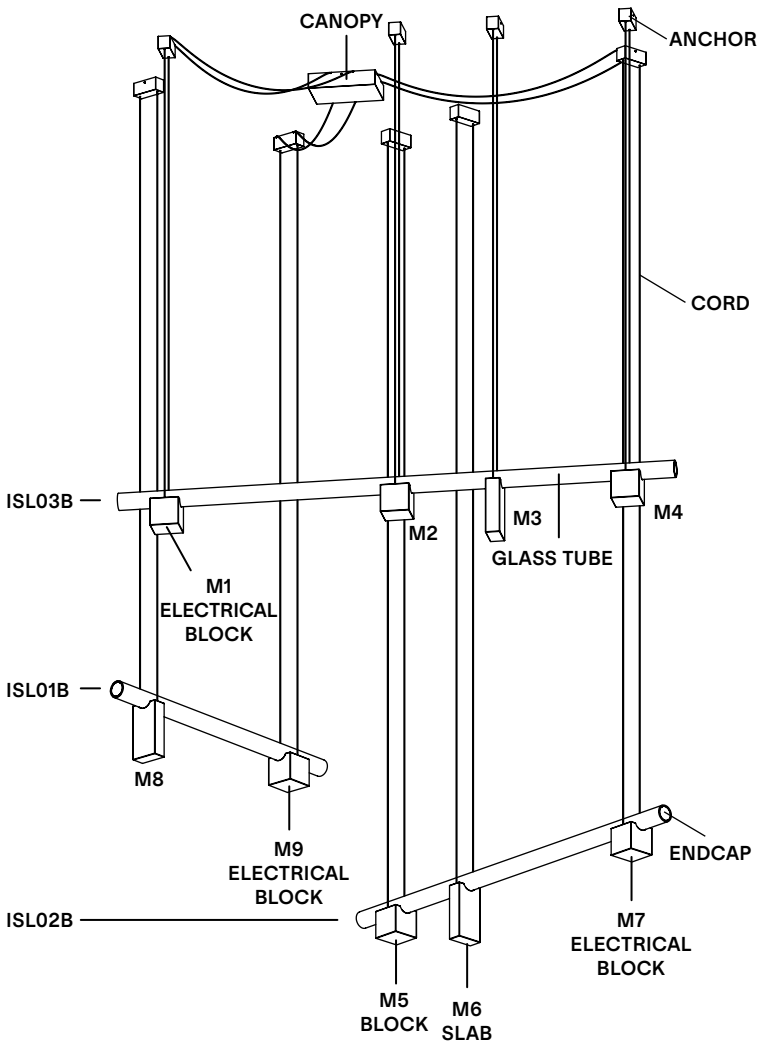

		Example	Fill with your selection
COLLECTION	ISL Isle	ISL	ISL
MODEL	14	14	14
MATERIAL	<div><div>P1</div><div>ISL03B - Black Marquina (M1) + Polished Aluminum (M2) + Black Marquina (M3) + Polished Aluminum (M4)</div><div>ISL02B - Polished Aluminum (M5) + Black Marquina (M6) + Polished Aluminum (M7)</div><div>ISL01B - Polished Aluminum (M8) + Black Marquina (M9)</div><div>P2</div><div>ISL03B - Black Marquina (M1) + Polished Aluminum (M2) + Pink Portugal (M3) + Guatemala Green (M4)</div><div>ISL02B - Polished Aluminum (M5) + Guatemala Green (M6) + Black Marquina (M7)</div><div>ISL01B - Polished Aluminum (M8) + Pink Portugal (M9)</div><div>P3</div><div>ISL03B - Pink Portugal (M1) + Polished Aluminum (M2) + Red Levanto (M3) + Red Negrais (M4)</div><div>ISL02B - Polished Aluminum (M5) + Pink Portugal (M6) + Red Levanto (M7)</div><div>ISL01B - Polished Aluminum (M8) + Red Negrais (M9)</div><div>AL</div><div>All models Polished Aluminum</div><div>ISL03B - Polished Aluminum (M1,M2,M3,M4)</div><div>ISL02B - Polished Aluminum (M5,M6,M7)</div><div>ISL01B - Polished Aluminum (M8,M9)</div></div>	P1	
CORD	BK Black	BK	BK
CANOPY AND ANCHORS	AL Polished aluminum	AL	AL
MOUNTING	<div><div>SM</div><div>Surface mounted</div><div>RM</div><div>Remote driver</div><div>DC</div><div>Daisy chain</div></div>	SM	
COLOUR TEMPERATURE (CCT)	<div><div>WL</div><div>Warm light (2700K)</div><div>NL</div><div>Neutral light (3000K)</div><div>D27</div><div>Dim to warm (2700K-2200K)</div><div>D30</div><div>Dim to warm (3000K-2200K)</div><div>CCT</div><div>Other CCT available upon request*</div></div>	WL	
DIMMING	<div><div>ZT</div><div>0-10V (120VAC only)</div><div>PH</div><div>Phase dimming</div><div>DA</div><div>DALI (220-240VAC only)</div></div>	ZT	
FULL SKU		ISL14P1BKALSMWLZT	
		NOTES	

\*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with Trailing Edge dimming (Reverse Phase/ELV) or Leading Edge (Forward Phase) dimming.  
We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron Diva	DVELV-300P	100%	1%	Phase Cut
Lutron Diva	DVELV-303P	100%	1%	Phase Cut
Lutron Diva	DVRP-253P	100%	1%	Phase Cut
Lutron Skylark	CTELV-303P	100%	1%	Phase Cut
Lutron Skylark	SELV-300P	100%	1%	Phase Cut
Lutron Skylark	SELV-303P	100%	1%	Phase Cut
Lutron Skylark	CTRP-253P	100%	1%	Phase Cut
Lutron Maestro	MA-PRO	100%	1%	Phase Cut
Lutron Caseta	PD-5NE	100%	1%	Phase Cut
Lutron Nova	NTELV-300	100%	1%	Phase Cut

Some dimmers require a minimum load, check specifications.

We recommend conducting your own test before final installation.