Silo 13

The Silo collection inhabits many worlds at once, creating a striking metaphor for duality. Mysterious yet inviting, the true magic lies in how its rhythmic curves shape light and space around it. Made using custom aluminium extrusions, the modular uplight-downlight creates a theatrical yet sleek composition

TYPE	Suspension
CONSTRUCTION	Powder coated, mirror polished or tumbled aluminum body Powder coated canopy Polycarbonate lens Polyurethane cord
SPECIFICATIONS	Source: LED array, integrated Power consumption: 44.5W Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output: 3000K downlight - 1310lm 3000K downlight and uplight - 1514lm 2700K downlight - 1248lm 2700K downlight and uplight - 1443lm Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming, DALI
CORD LENGTH	120" / 304 cm
STAINLESS STEEL CABLE	96" / 244 cm
WEIGHT	SIL2SB - 3.71 lbs / 1.4 Kg SIL3SA - 4.13 lbs / 1.8 Kg SIL3SD - 5.10 lbs / 2.3 Kg SIL4SA - 5.49 lbs / 2.3 Kg
CERTIFICATIONS	IP20
WARRANTY	2 years

Spec Drawings

Suggested installation

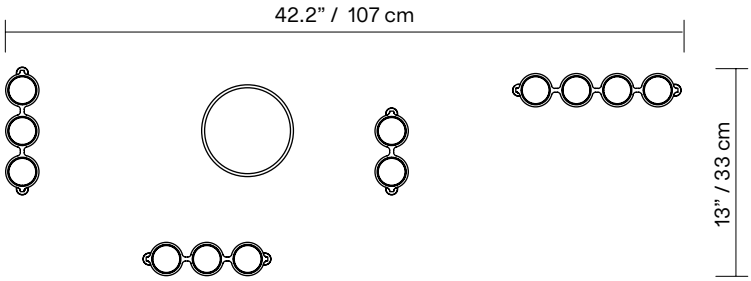

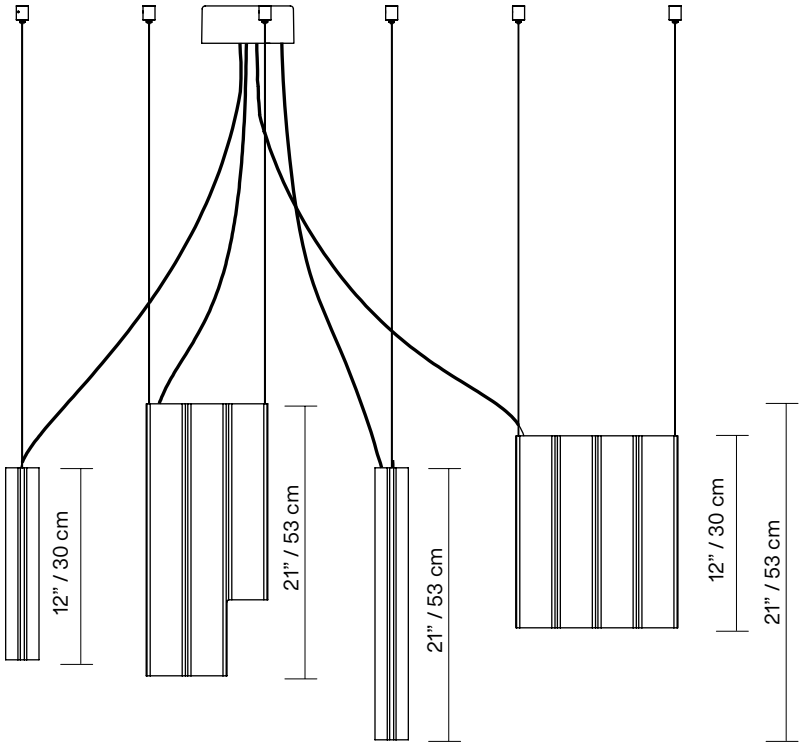

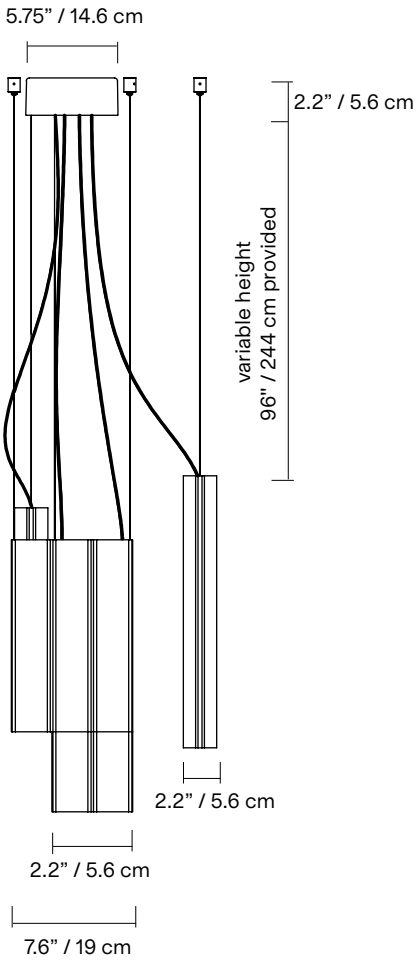

*dimensions are approximate and may vary slightly

Order Guide: SKU

FINISH

PALETTE 4

BK
Textured black

MR
Mirror polished

TA
Tumbled aluminum

WH
Textured white

BG
Textured beige

DP
Wrinkled dusty pink

TC
Textured terracotta

AU
Textured aubergine

OB
Glossy oxblood

MB
Textured midnight blue

CORD

BK
Black

WH
White

CU
Cumin

MOUNTING

SM
Surface mounted

CONFIGURATION

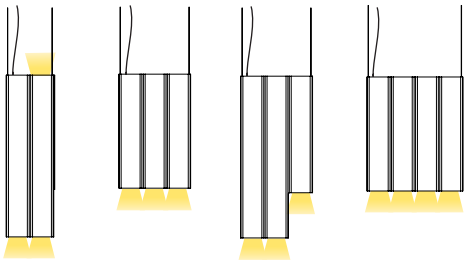

NOTES

– Must be installed by an electrician
– Ceiling anchors not meant for slanted ceilings (available upon request)
– LED may only be changed by Lambert & Fils or other authorized personnel
– Not protected against liquids (refer to IP20)
– Additional charges for modifications or for special orders
– Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

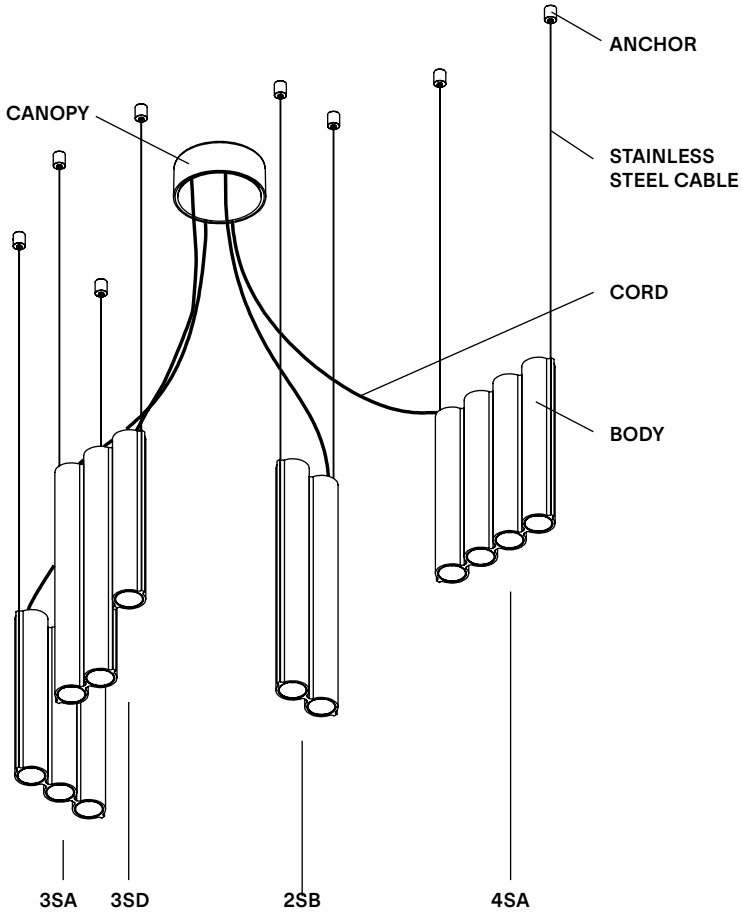

Order Guide: SKU

			Example	Fill with your selection
COLLECTION	**SIL**	Silo	SIL	**SIL**
MODEL	**13**		13	**13**
BODIES **(All choices other than Palette 4 are a monochrome cluster)**	**P4**	Palette 4 (2SB in mirror polished aluminum, all other modesl in black)	P4	
	BK	Textured black		
	WH	Textured white		
	MR	Mirror polished aluminum		
	TA	Tumbled aluminum		
	BG	Textured beige		
	DP	Wrinkled dusty pink		
	TC	Textured terracotta		
	AU	Textured aubergine		
	OB	Glossy oxblood		
	MB	Textured midnight blue		
	CC	Custom colour*		
CORD	**BK**	Black	BK	
	WH	White		
	CU	Cumin		
CANOPY AND ANCHORS	**BK**	Textured black	BK	
	WH	Textured white		
	BG	Textured beige		
	DP	Wrinkled dusty pink		
	TC	Textured terracotta		
	AU	Textured aubergine		
	OB	Glossy oxblood		
	MB	Textured midnight blue		
	CC	Custom colour*		
MOUNTING	**SM**	Surface mounted	SM	**SM**
COLOUR TEMPERATURE (CCT)	**WL**	Warm light (2700K)	WL	
	NL	Neutral light (3000K)		
	D27	Dim to warm (2700K-2200K)		
	D30	Dim to warm (3000K-2200K)		
	CCT	Other CCT available upon request**		
DIMMING	**ZT**	0-10V (120VAC only)	ZT	
	PH	Phase dimming		
	DA	DALI (220-240VAC only)		
FULL SKU			SIL13P4BKBKSMWLZT	
			NOTES	

*Custom colour available upon request. Material library on website.
**Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.