
Silo 4F



The Silo collection inhabits many worlds at once, creating a striking metaphor for duality. Mysterious yet inviting, the true magic lies in how its rhythmic curves shape light and space around it. Made using custom aluminium extrusions, the modular uplight-downlight creates a theatrical yet sleek composition.

| Polished aluminum base Satin polished aluminum base Polycarbonate lens Vinyl cord SPECIFICATIONS Source: LED array integrated Power consumption: 7.6W Colour temperature : 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output: 3000K - 243Im 2700K - 231Im Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h | | | | |
|--|----------------|--|--|--|
| Polished aluminum base Satin polished aluminum base Polycarbonate lens Vinyl cord SPECIFICATIONS Source: LED array integrated Power consumption: 7.6W Colour temperature : 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output: 3000K - 243Im 2700K - 231Im Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h CONTROL 100-240 VAC Plug-in Driver, foot control dimme foot switch: 96"/ 244 cm provided switch positioned at 24"/ 61 cm from body WEIGHT 22.5 lb / 10.2 Kg | ТҮРЕ | Floor | | |
| Power consumption: 7.6W Colour temperature : 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output: 3000K - 243Im 2700K - 231Im Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h CONTROL 100-240 VAC Plug-in Driver, foot control dimme CORD foot switch: 96"/ 244 cm provided switch positioned at 24"/ 61 cm from body WEIGHT 22.5 lb / 10.2 Kg | CONSTRUCTION | Satin polished aluminum base Polycarbonate lens | | |
| 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output: 3000K - 243Im 2700K - 231Im Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h CONTROL 100-240 VAC Plug-in Driver, foot control dimme CORD foot switch: 96"/ 244 cm provided switch positioned at 24"/ 61 cm from body WEIGHT 22.5 lb / 10.2 Kg | SPECIFICATIONS | , , | | |
| 3000K - 243Im 2700K - 231Im Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h 100-240 VAC Plug-in Driver, foot control dimme CORD foot switch: 96"/ 244 cm provided switch positioned at 24"/ 61 cm from body WEIGHT 22.5 lb / 10.2 Kg | | 3000K 2700K dim to warm 3000K to 2200K | | |
| Colour consistency: 3 SDCM Expected lifetime: ≥50 000h CONTROL 100-240 VAC Plug-in Driver, foot control dimme CORD foot switch: 96"/ 244 cm provided switch positioned at 24"/ 61 cm from body WEIGHT 22.5 lb / 10.2 Kg | | 3000K - 243lm | | |
| CORD foot switch: 96"/ 244 cm provided switch positioned at 24"/ 61 cm from body WEIGHT 22.5 lb / 10.2 Kg | | Colour consistency: 3 SDCM | | |
| WEIGHT 22.5 lb / 10.2 Kg | CONTROL | 100-240 VAC Plug-in Driver, foot control dimmer | | |
| | CORD | • | | |
| WARRANTY 2 years | WEIGHT | 22.5 lb / 10.2 Kg | | |
| | WARRANTY | 2 years | | |

lambert&fils

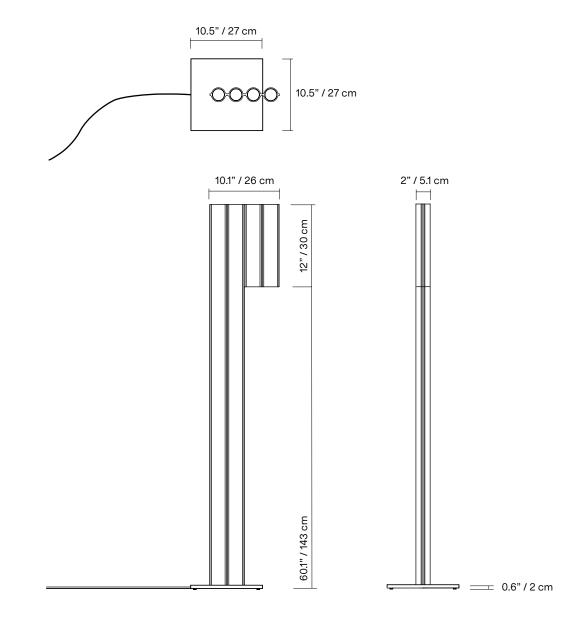


*dimensions are approximate and may vary slightly

FINISH ΒK WН MR BG Textured Textured Mirror Textured black white polished beige DP тс AU OB MB Wrinkled Textured Textured Glossy Textured dusty pink terracotta aubergine oxblood midnight blue CORD ΒK Black CONFIGURATION

NOTES

- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
 Please refer to maintenance sheet on our website for cleaning instructions

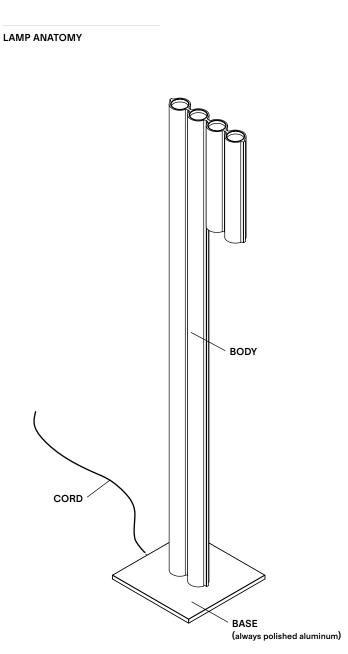

Order Guide: SKU

| | | Example | Fill with your selection |
|--------------------------|--|--------------|--------------------------|
| COLLECTION | SIL Silo | SIL | SIL |
| MODEL | 4F | 4F | 4F |
| SHAPE | I | I | |
| BODY | BKTextured blackWHTextured whiteMRMirror polished aluminumBGTextured beigeDPWrinkled dusty pinkTCTextured terracottaAUTextured aubergineOBGlossy oxbloodMBTextured midnight blueCCCustom colour* | ВК | |
| CORD | BK Black | BK | ВК |
| COLOUR TEMPERATURE (CCT) | WLWarm light (2700K)NLNeutral light (3000K)D27Dim to warm (2700K-2200K)D30Dim to warm (3000K-2200K)CCTOther CCT available upon request** | WL | |
| FULL SKU | | SIL4FIBKBKWL | |
| | | NOTES | |

*Custom colour available upon request. Material library on website. **Other CCT: 2200K, 3500K and 4000K (not available in Dim-to-Warm feature)

4