
Silo 4T




The Silo collection inhabits many worlds at once, creating a striking metaphor for duality. Mysterious yet inviting, the true magic lies in how its rhythmic curves shape light and space around it. Made using custom aluminium extrusions, the modular uplight-downlight creates a theatrical yet sleek composition

TYPE	Table Powder coated, mirror polished or tumbled aluminum body Polycarbonate lens Vinyl cord		
CONSTRUCTION			
SPECIFICATIONS	Source: LED array integrated Power consumption: 7.6W		
	Colour temperature : 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output:		
	3000K - 456lm 2700K - 435lm		
	Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h		
CONTROL	100-240 VAC Plug-in Driver, cord dimmer		
CORD LENGTH	96"/ 244 cm provided cord dimmer positioned at 18"/ 46 cm from body		
WARRANTY	2 years		


lambert&fils

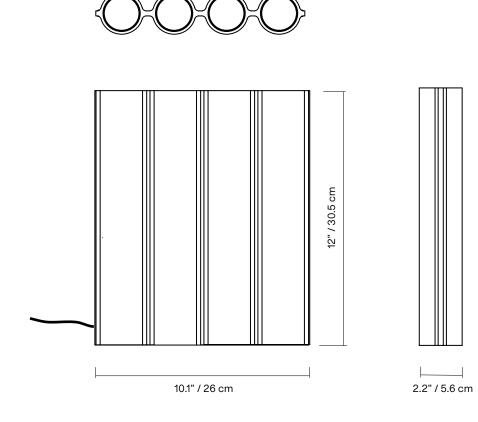

*dimensions are approximate and may vary slightly

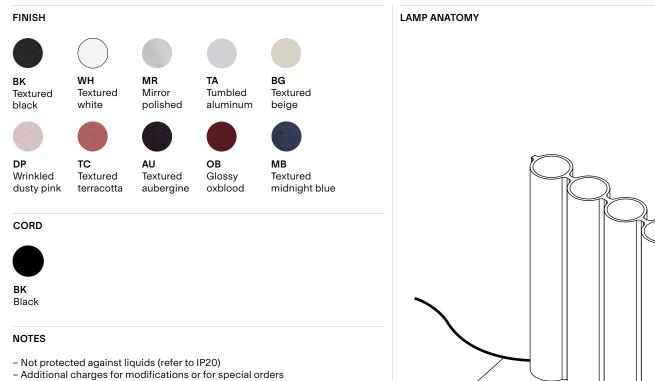

- Please refer to maintenance sheet on our website for cleaning instructions



Order Guide: SKU

		Example	Fill with your selection
COLLECTION	SIL Silo	SIL	SIL
MODEL	4T	4T	4T
SHAPE	A	A	A
BODY	BKTextured blackWHTextured whiteMRMirror polished aluminumTATumbled aluminumBGTextured beigeDPWrinkled dusty pinkTCTextured terracottaAUTextured aubergineOBGlossy oxbloodMBTextured midnight blueCCCustom colour*	ВК	
CORD	BK Black	ВК	ВК
COLOUR TEMPERATURE (CCT)	 F22 Fixed 2200K F27 Fixed 2700K F30 Fixed 3000K D27 Dim to warm 2700K-2200K D30 Dim to warm 3000K-2200K CCT Other CCT available upon request** 	F22	
FULL SKU		SIL4TABKBKF22	
		NOTES	

*Custom colour available upon request. Material library on website.

**Other CCT: 2200K, 3500K and 4000K (not available in Dim-to-Warm feature)