

Isle 15








ISLE 15 - COLOUR PALETTE 1

ISL01B: Guatemala Green + Polished Aluminum



ISL03B: Black Marquina + Polished Aluminum + Guatemala Green + Polished Aluminum

An ode to quiet strength, Isle is a play both on illusion and perception allowing lightness to anchor and foundations to rise. Composed of a delicate glass tube resting on solid-stone and aluminum pedestals and suspended in mid-air like a surreal bridge, Isle is minimal, but never simplistic.


TYPE	Suspension
CONSTRUCTION	Frosted glass tube Polished aluminum or marble block Polished aluminum endcap, canopy and anchors Polyester cord
SPECIFICATIONS	Power consumption: 52W Colour temperature: 3000K 2700K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output: 2700K - 2815 lm Colour rendering index: ≥ 90 CRI Colour consistency: 3 SDCM Expected lifetime: $\geq 50\,000$ h
CONTROL	120/277V on/off, 0-10V, or phase dimming 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models on page 6
CORD LENGTH	Mains/line cord- 120" / 304 cm Non-electrical cord- 96" / 244 cm
WEIGHT	ISL01B- 12lb / 5.4Kg ISL03B- 20.5lb / 9.3Kg
CERTIFICATIONS	     IP20
WARRANTY	2 years

NOTES


- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire)
Min - 12"/30 cm
Max - 100"/254 cm
*For any height outside these parameters, contact Lambert & Fils
- For installation on slanted ceiling, contact Lambert & Fils
- Ceiling anchors can be used as junction boxes for daisy chain. If needed, please inform your representative.
- Dimensions are approximate and may vary slightly

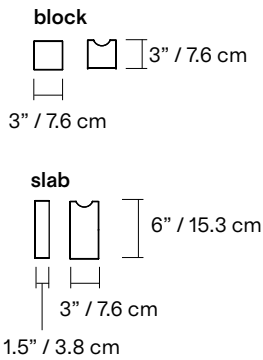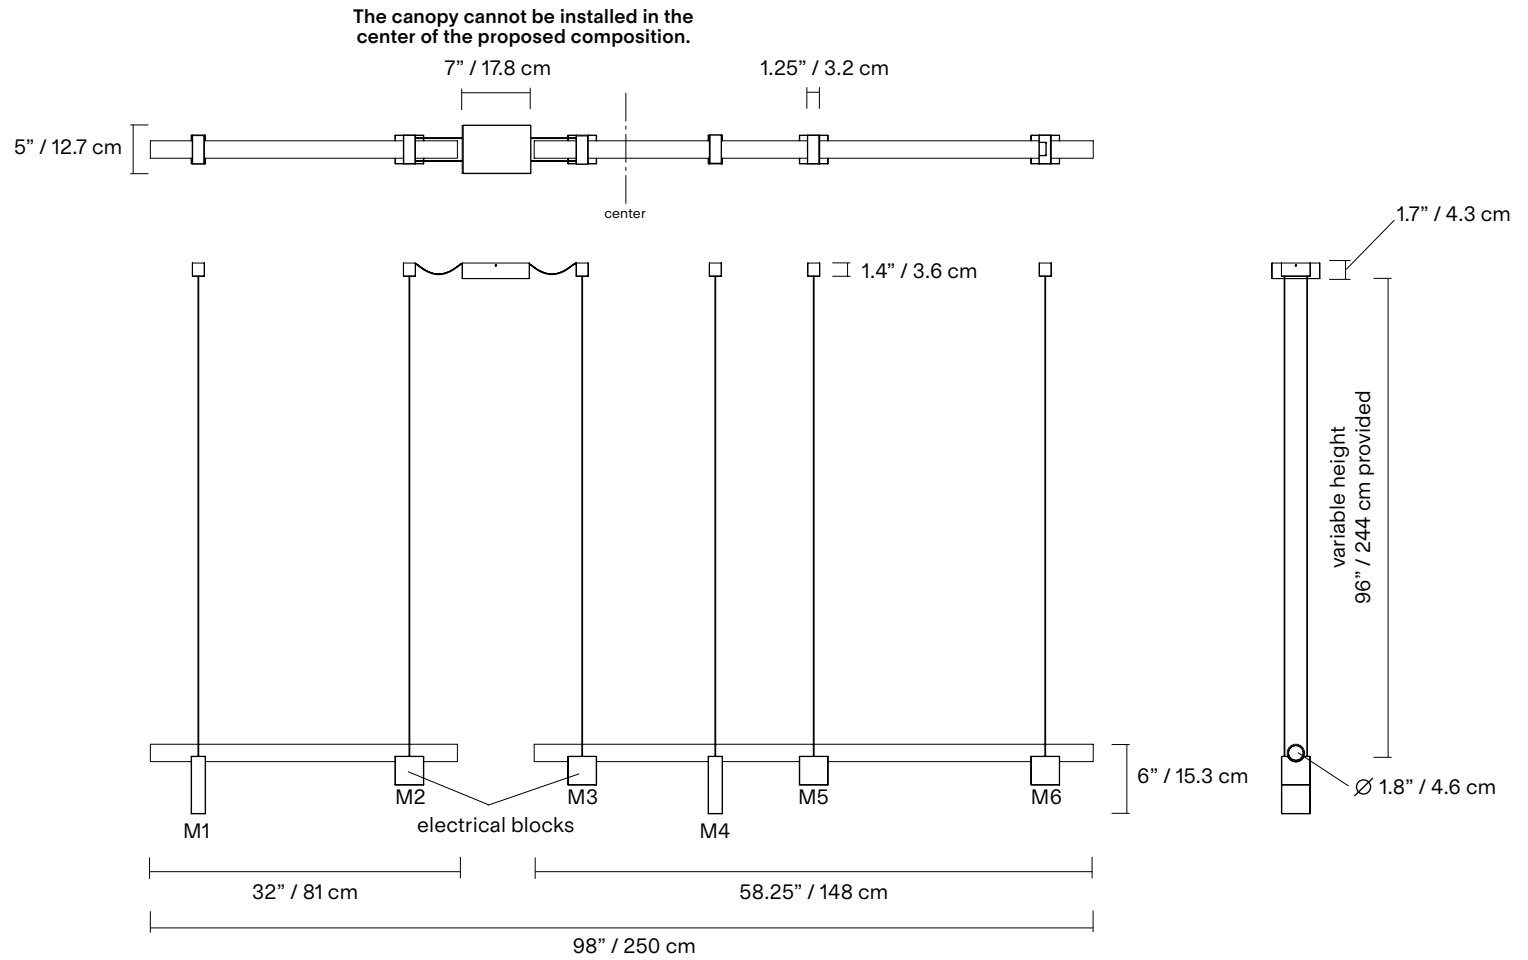

SM- Surface mounted

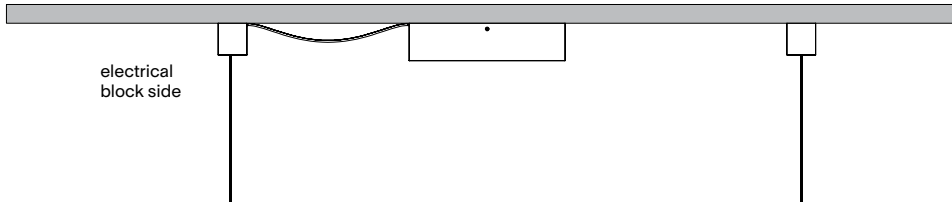

RM-Remote driver

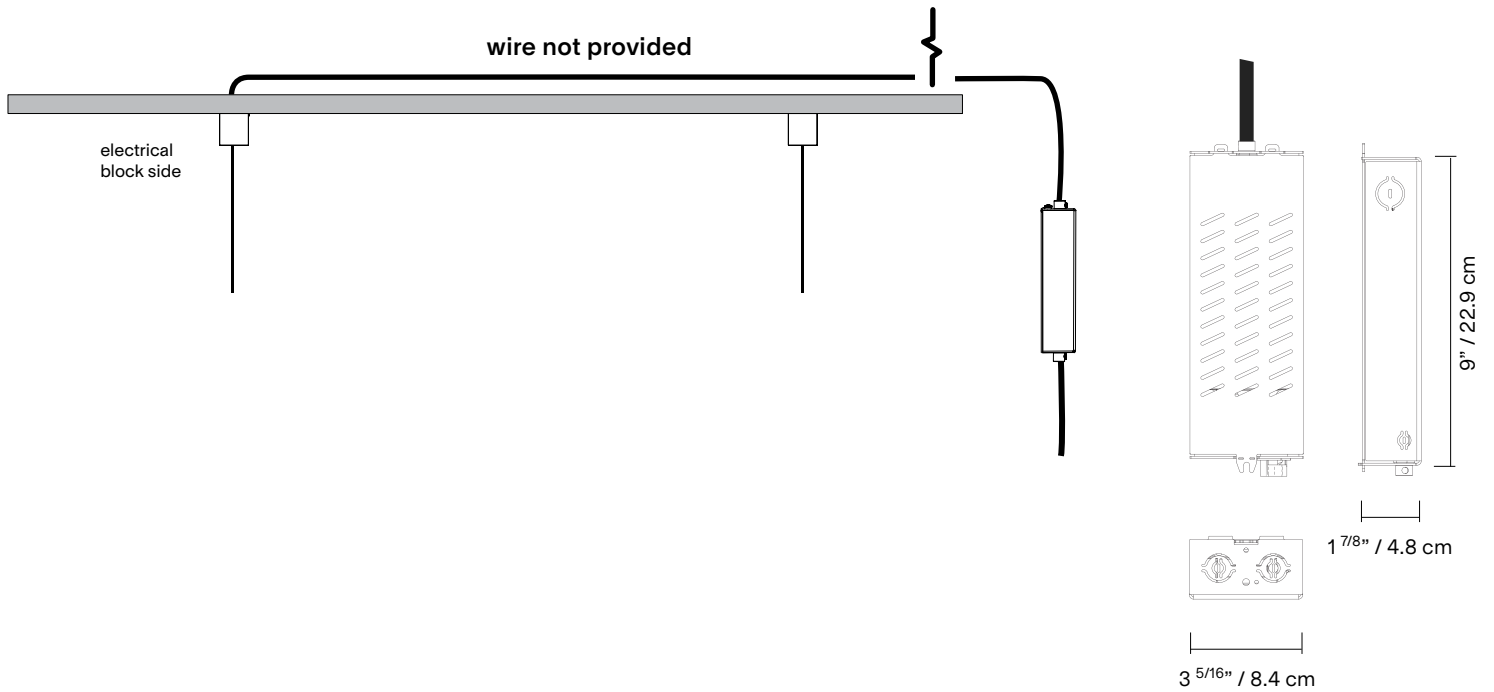

*housing not necessary for Phase Dimming 220-240VAC (only driver provided)

REMOTE DRIVER HOUSING

Must be accessible for maintenance in a well aerated location for heat dissipation

Use the following chart to determine proper wiring gauge according to the distance to its location.


GAUGE

- 18AWG (0.75mm²)
- 16AWG (1.5mm²)
- 14AWG (2.5mm²)
- 12AWG (4mm²)

MAX ALLOWABLE DISTANCE

- 85 ft. / (26 m)
- 136 ft. / (41 m)
- 216 ft. / (66 m)
- 343 ft. / (105 m)

MATERIAL

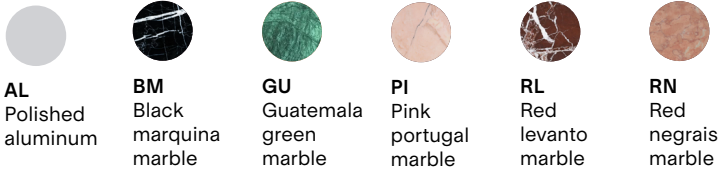


CORD



MOUNTING

SM
Surface mounted




RM
Remote Driver



NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

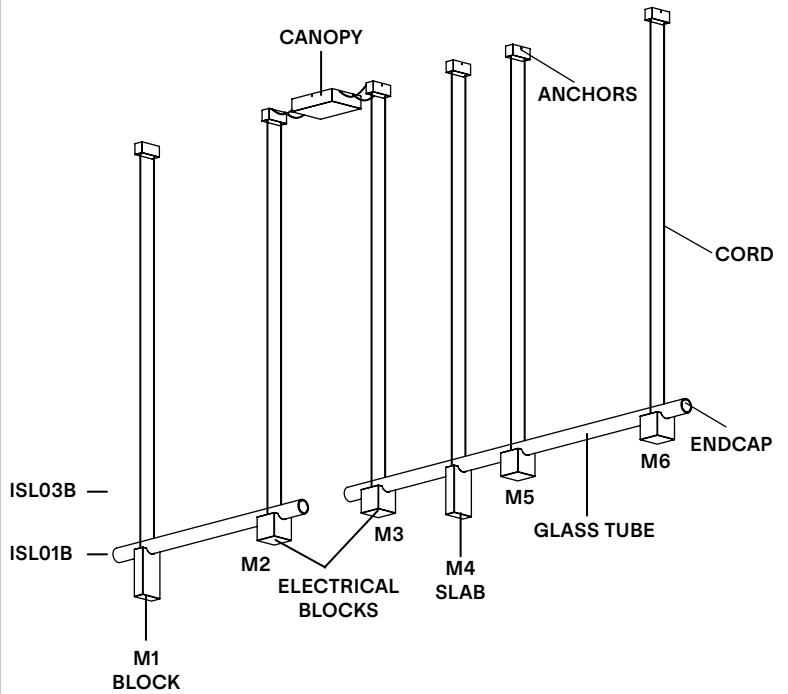

		Example	Fill with your selection
COLLECTION	ISL Isle	ISL	ISL
MODEL	15	15	15
MATERIAL (Electrical block always polished aluminum)	P1 ISL01B - Guatemala Green (M1) + Polished Aluminum (M2) ISL03B - Black Marquina (M3) + Polished Aluminum (M4) + Guatemala Green (M5) + Polished Aluminum (M6) P2 ISL01B - Polished Aluminum (M1) + Guatemala Green (M2) ISL03B - Black Marquina (M3) + Polished Aluminum (M4) + Red Negrais (M5) + Guatemala Green (M6) P3 ISL01B - Red Levanto (M1) + Red Negrais (M2) ISL03B - Pink Portugal (M3) + Red Levanto (M4) + Pink Portugal (M5) + Red Negrais (M6) P4 ISL01B - Polished Aluminum (M1) + Pink Portugal (M2) ISL03B - Red Levanto (M3) + Polished Aluminum (M4) + Red Levanto (M5) + Pink Portugal (M6) AL All models Polished Aluminum ISL01B - Polished Aluminum (M1, M2) ISL03B - Polished Aluminum (M3, M4,M5)	P1	
CORD	BK Black	BK	BK
CANOPY AND ANCHORS	AL Polished aluminum	AL	AL
MOUNTING	SM Surface mounted RM Remote driver	SM	
COLOUR TEMPERATURE (CCT)	WL Warm light (2700K) NL Neutral light (3000K) D27 Dim to warm (2700K-2200K) D30 Dim to warm (3000K-2200K) CCT Other CCT available upon request*	WL	
DIMMING	ZT 0-10V (120VAC only) PH Phase dimming DA DALI (220-240VAC only)	ZT	
FULL SKU		ISL15P1BKALSMWLZT	

NOTES

*Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

TESTED DIMMER COMPATIBILITY LIST - 120V

Compatible with Trailing Edge dimming (Reverse Phase/ELV) or Leading Edge (Forward Phase) dimming.
We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron Diva	DVELV-300P	100%	1%	Phase Cut
Lutron Diva	DVELV-303P	100%	1%	Phase Cut
Lutron Diva	DVRP-253P	100%	1%	Phase Cut
Lutron Skylark	CTELV-303P	100%	1%	Phase Cut
Lutron Skylark	SELV-300P	100%	1%	Phase Cut
Lutron Skylark	SELV-303P	100%	1%	Phase Cut
Lutron Skylark	CTRP-253P	100%	1%	Phase Cut
Lutron Maestro	MA-PRO	100%	1%	Phase Cut
Lutron Caseta	PD-5NE	100%	1%	Phase Cut
Lutron Nova	NTELV-300	100%	1%	Phase Cut

Some dimmers require a minimum load, check specifications.

We recommend conducting your own test before final installation.
