PARC 07



Ceiling

Parc is a collection inspired by childhood imagination and the essentiality of homemade forms — created in collaboration with Swiss designer Adrien Rovero. Evoking the archetype of a flashlight, each lamp of the Parc Collection is a playful reminder of time spent in nature, when a simple tube and piece of string could be used to fashion any number of creations. These makeshift things, at once naive and functional, harness the unique beauty of peeling an object back to its essence.

TYPE	Wall and ceiling			
CONSTRUCTION	Hand blown frosted glass Powder coated aluminum body			
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 4.5W Lumen output: 319Im			
	Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: ≥ 25 000h			
CONTROL	Refer to our recommended list of dimmer models			
WEIGHT	2.2lb / 1kg			
CERTIFICATIONS	® UK CE Wohs ⊗ IP20			
WARRANTY	2 years			




Wall

Spec Drawings

2

NOTES

- Luminaire must be installed over a junction box for connection purposes. Please consult installation manual for more details.
- Dimensions are approximate and may vary slightly

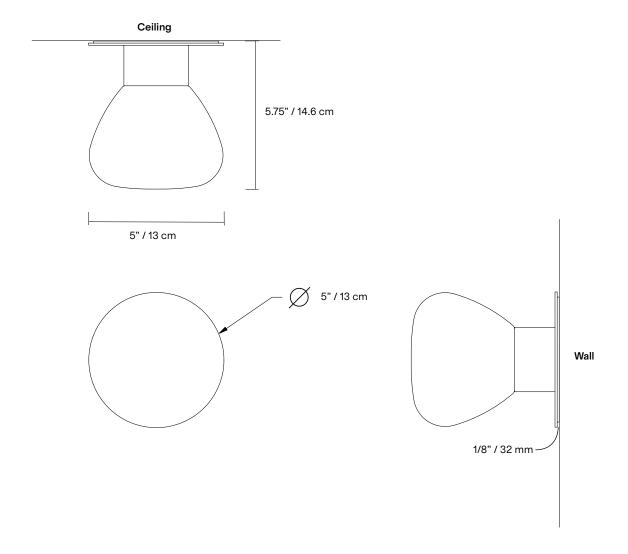

FINISH



Textured

Textured

green

black






white

Textured

terracotta





midnight

blue



Textured

blue




Textured

beige







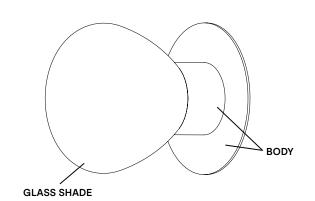

		Example	Fill with your selection
COLLECTION	PRC Parc	PRC	PRC
MODEL	07	07	07
BODY	BK Textured Black WH Textured White MB Textured Midnight Blue BE Textured Blue BG Textured Beige BU Textured Burgundy GN Textured Green TC Textured Terracotta CC Custom colour*	ВК	
FULL SKU		PRC07BK	

NOTES

*Custom colour available upon request. Material library on website.

NOTES

- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

 $\ensuremath{^{\star\star}}\xspace$ Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.