
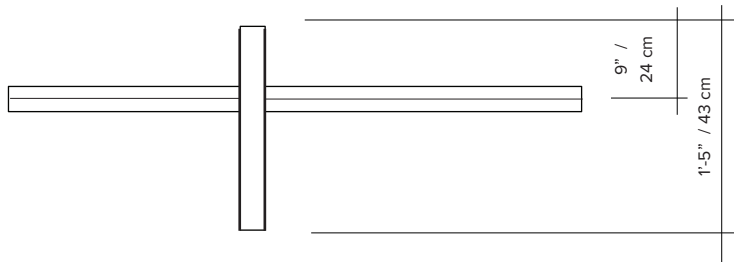

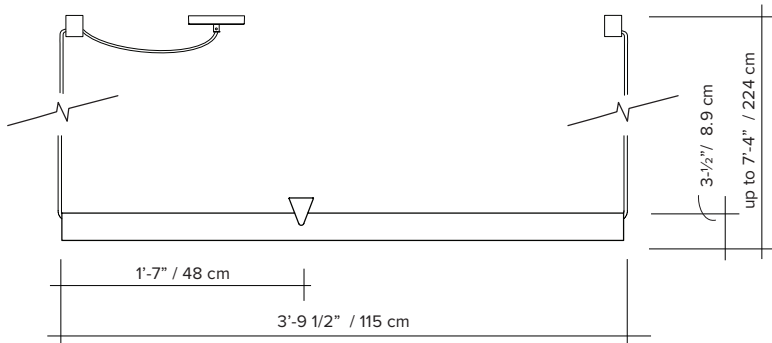


## MILE 03




- type:** suspension
- materials:** body: powder coated aluminum  
lens: frosted polycarbonate  
hardware: powder coated aluminum  
wire: polyester
- wire length:** 108" live wire feed  
84" unloaded wire
- weight:** 5.5 lb / 2.5 kg
- light source:** 88W  
(see lightbulb section for specifications)
- voltage:** 120V / 240V
- dimmer:** refer to our recommended list of dimmer models
- certifications:** 
- notes:**
- must be installed by an electrician
  - additional charges for modifications or for special orders
  - dimensions are approximate and may vary slightly
  - lead time 12 weeks




## ORDER GUIDE: SKU


COLLECTION		MODEL	COLOUR (frame/wire/anchor)		COLOUR (canopy)		MOUNTING TYPE	
Mile	Mile	03	BL	black	WH	white	SM	single mounting * Row mounting available
			BU	burgundy				
			BG	beige				
			GN	green				
MIL		03	BL		WH		SM	= MIL03BLWHSM <b>example</b>

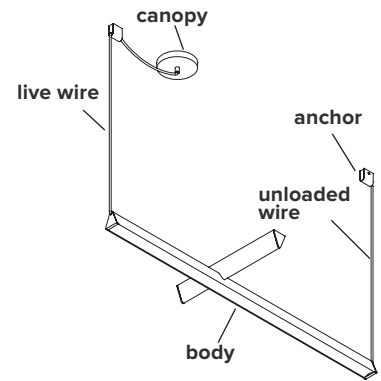


### COLOUR

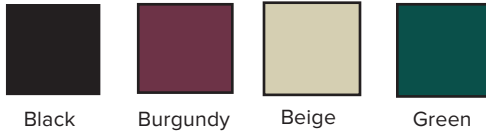

### MOUNTING TYPE




Single mounting

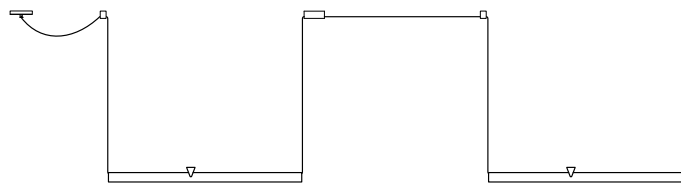


Row mounting available  
(please consult sales team)

### ANCHORS




Regular anchor



Connecting anchor  
for row mounting

**LIGHT BULB & DIMMER SPECIFICATIONS**

**AC LED BOARD**

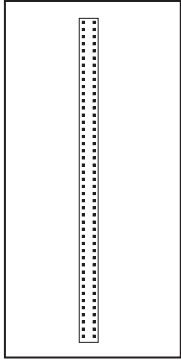

88 W  
 100V-120V / 240V  
 uplight 1040 lumens  
 downlight 2860 lumens  
 LED 2700K  
 50 000 H  
 CRI ≥90  
 2 years warranty  
 3 SDCM consistency

**DIMMER LIST COMPATIBILITY – 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	10%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	10%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	10%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	10%	no	very good
LUTRON - DIVA	DVELV-300P	100%	10%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.