


# lambert&fils

## DOT - ANTIPODE

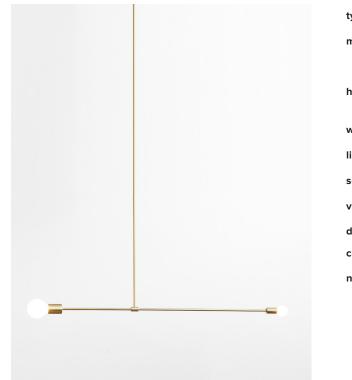


type	suspension					
materials	body : spheres : hardware :	brass milk glass (G50 + G100) brass				
height	8 ½" 14 ½" 216 mm 368 mm	-	-	38 ½" 978 mm		
weight	min. 2 lb / 0.9 kg - max. 2.5 lb / 1.1 kg					
light bulb	LED (included), 1x 4.5W + 1x 3.5W					
sockets	G9					
voltage	120V / 240V					
dimmer	refer to our recommended list of dimmer models					
certifications	°∰n C € ⊕					
notes	<ul> <li>must be installed by an electrician;</li> <li>additional charges for modifications or for special orders;</li> <li>lead time between 7-9 weeks;</li> <li>dimensions are approximate and may vary slightly.</li> </ul>					

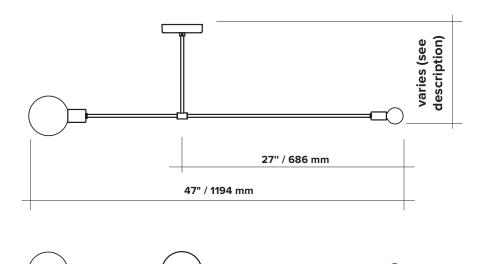



# lambert&fils

### **ORDER GUIDE: SKU**

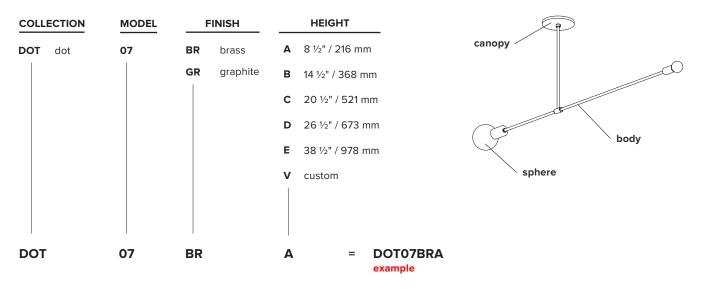

### FINISH



brass

graphite


CANOPY swivel option for slanted ceiling




## lambert&fils

## LIGHT BULB & DIMMER SPECIFICATIONS

#### **G9 SOCKETS**

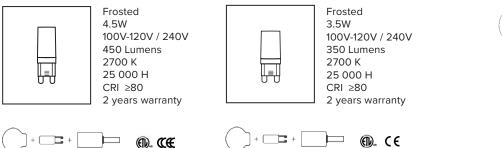

SPHERES



### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL		FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO NIKO	V-PRO 3 996 35 310-0280X 310-0190X	100% 87% 94% 100%	2% 15% 5% 1%	no no no	very good good very good very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.