
lambert&fils

LAURENT 02

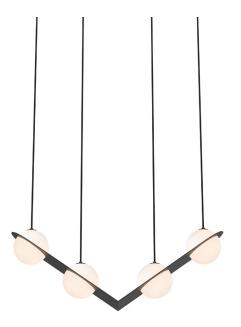

2" 50 mm

> 84" / 2133 mm 99" / 2514 mm

13" 330 mm

8" 203 mm


type	suspension	suspension				
materials	sphere: frame:	handblown opaline glass polished brass or powder coated aluminum or nickel plated steel				
	hardware:	polished brass or powder coated aluminium				
	wire:	nylon/polyester				
weight	13,5 lb / 6 kg	13,5 lb / 6 kg				
light bulb	· /·	LED (included), 4,5W (see lightbulb section for specifications)				
sockets	G9					
voltage	120V / 240V					
dimmer	refer to our recommended list of dimmer models					
certifications						
notes	 must be installed by an electrician additional charges for modifications or for special orders load time between 7.9 weeks 					


– lead time between 7-9 weeks.

48 " 1219 mm incl.


- dimensions are approximate and may vary slightly.

parallel wires

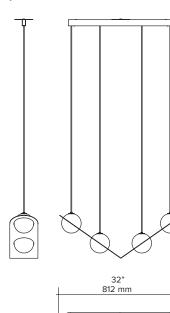

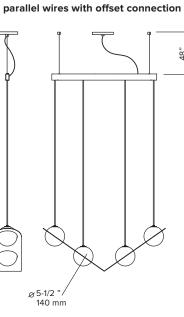


angled wires

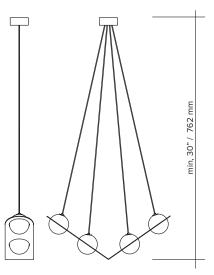

Updated: December 2018

lambert&fils


ORDER GUIDE: SKU

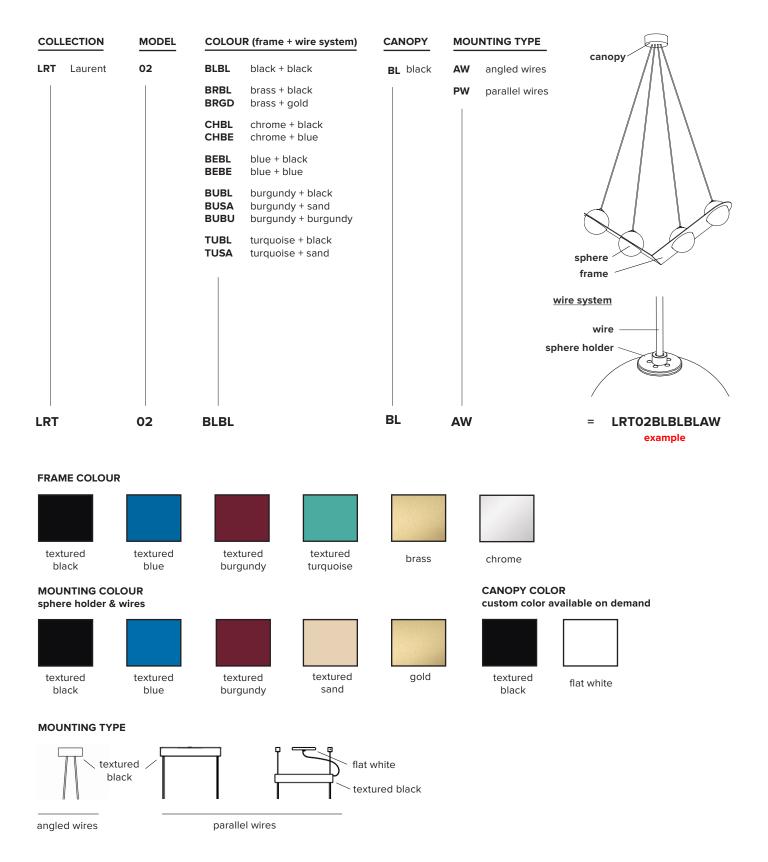

lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



+ 🗖 + 🗖 –

Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

.€

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL		FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.