
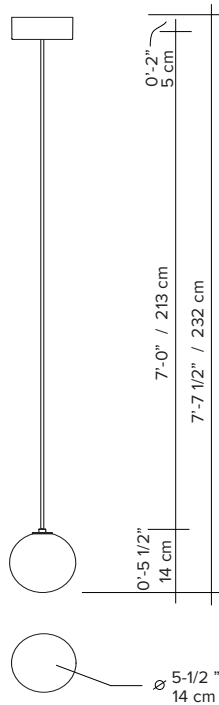


## LAURENT 10





<b>type</b>	suspension
<b>materials</b>	sphere: handblown opaline glass hardware: polished brass or powder coated aluminium wire: nylon
<b>weight</b>	2,5 lb / 1 kg
<b>light bulb</b>	LED (included), 4,5W (see lightbulb section for specifications)
<b>sockets</b>	G9
<b>voltage</b>	120V / 240V
<b>dimmer</b>	refer to our recommended list of dimmer models
<b>certifications</b>	
<b>notes</b>	<ul style="list-style-type: none"> <li>- must be installed by an electrician</li> <li>- additional charges for modifications or for special orders</li> <li>- lead time between 8 to 9 weeks.</li> <li>- dimensions are approximate and may vary slightly.</li> </ul>




## ORDER GUIDE: SKU

<u>COLLECTION</u>	<u>MODEL</u>	<u>COLOUR (wire system)</u>	<u>CANOPY</u>
LRT Laurent	10	<b>BL</b> black <b>BE</b> blue <b>BU</b> burgundy <b>GD</b> gold <b>SD</b> sand	<b>BL</b> black
LRT	10	BL	BL

= **LRT10LBL**  
example

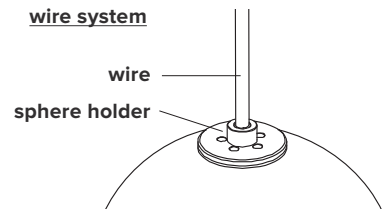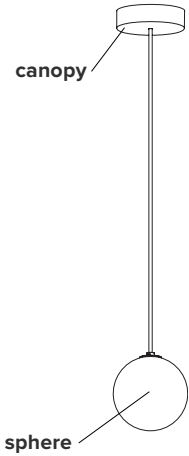

### MOUNTING COLOUR sphere holder & wire



textured black




textured blue



textured burgundy




textured sand



textured gold


### CANOPY COLOR



flat black

## LIGHT BULB & DIMMER SPECIFICATIONS

### G9 SOCKETS



Frosted  
4.5W  
100V-120V / 240V  
450 Lumens  
2700 K  
25 000 H  
CRI ≥80  
2 years warranty



### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.