# lambert&fils

## **DOT ATOMIUM**



**type** suspension

materials body: brass

sphere: milk glass (G50)

hardware: brass

 total height
 24 ½"
 30 ½"
 36 ½"
 42 ½"
 54 ½"

 622mm
 775 mm
 927mm
 1080mm
 1384mm

weight (min.) min. 5.5 lb / 2.5 kg - max. 6 lb / 2.7 kg

light bulb LED (included), 12x 3.5W

sockets G9

voltage 120V / 240V

**dimmer** refer to our recommended list of dimmer models

certifications continue certifications certification certi


**notes** – must be installed by an electrician;

additional charges for modifications or for special orders;

lead time between 7-9 weeks;


dimensions are approximate and may vary

slightly.

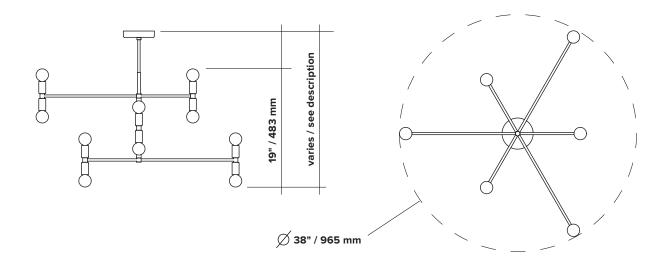

# lambert&fils

# **ORDER GUIDE: SKU**

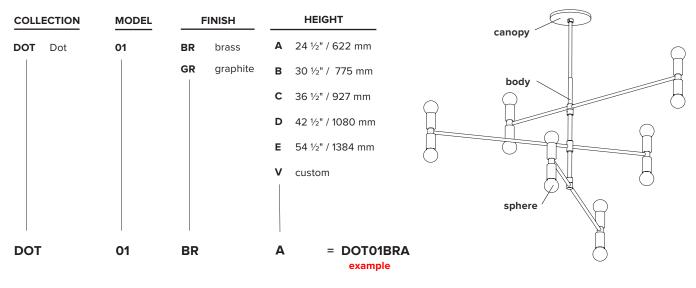

#### **FINISH**



CANOPY swivel option for slanted ceiling





# lambert&fils

## LIGHT BULB & DIMMER SPECIFICATIONS

#### **G9 SOCKETS**

## **SPHERES**









#### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

#### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V**

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO	V-PRO 3 996 35 310-0280X	100% 87% 94%	2% 15% 5%	no no no	very good good very good
NIKO	310-0190X	100%	1%	no	very good

 $<sup>^{*}</sup>$ Other dimmers can yield good results and we recommand conducting your own test before final installation.