# lambert&fils




### DOT WALL


The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

type:	wall - softwire (SW) or hardwire (HW)				
construction:	brass or powder coated steel and brass body milk glass globe vinyl cord (SW)				
specifications:	source: LED lamp provided (G9 base) power consumption: 3.5W lumen output: 289Im colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: ≥ 25 000h				
control:	refer to our recommended list of dimmer models (HW)				
cord length:	SW: 96" / 244 cm, hand switch at 18" / 46 cm from lamp				
weight:	min. 1.5 lb / 0.7 kg				
certifications:	ே Шата ( є иконз 💩 ІР20				
warranty:	2 years				

HARDWIRE




SOFTWIRE



## lambert&fils

**ORDER GUIDE: SKU** 

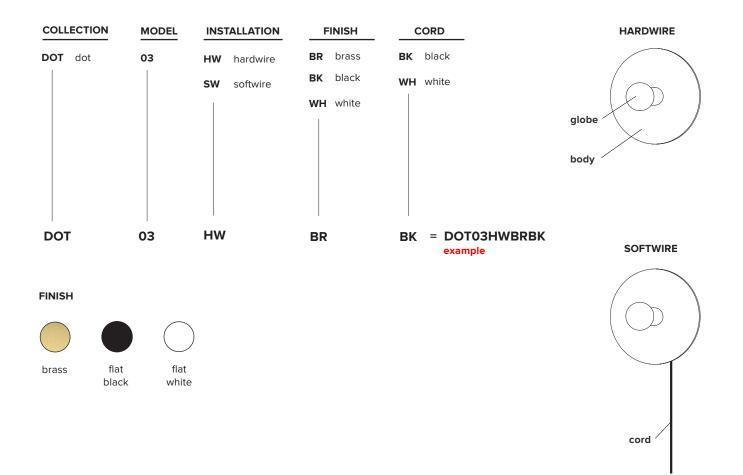

#### NOTES:

- must be installed by an electrician (HW)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

## lambert&fils

## DIMMER SPECIFICATIONS (only for HW)

#### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO LUTRON - SKYLARK LUTRON - SKYLARK LUTRON - SKYLARK LUTRON - DIVA LEGRAND - ADORNE	MAELV-600 SELV-300P SELV-303P CTELV-303P DVELV-300P TRUE UNIVERSAL	0% 0% 0% 0% 30%	100% 100% 100% 100% 100%	0%-10% no no no no	good very good very good very good very good good

#### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V**

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

### EU ENERGY LABEL

