

lambert&fils

BEAUBIEN SUSPENSION





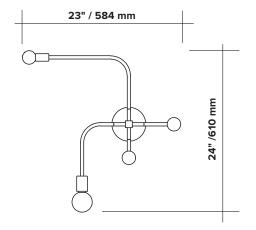

type suspension

materials body: powder coated aluminium

hardware: brass

sphere: milk glass (G50-G80) canopy: powder coated steel

wire: nylon

total height 23" 27" 31" 35" 41" 53" 584 mm 686mm 787mm 889mm 1041mm 1346mm

weight min. 2.4 lb / 1.1 kg - max. 2.7 lb / 1.2 kg

light bulb LED (included), 1 x 4.5W + 3 x 3.5W

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models

certifications ()

notes – must be installed by an electrician;

additional charges for modifications or for

special orders:


– lead time between 8-9 weeks;

dimensions are approximate and may vary

slightly.

lambert&fils

ORDER GUIDE: SKU

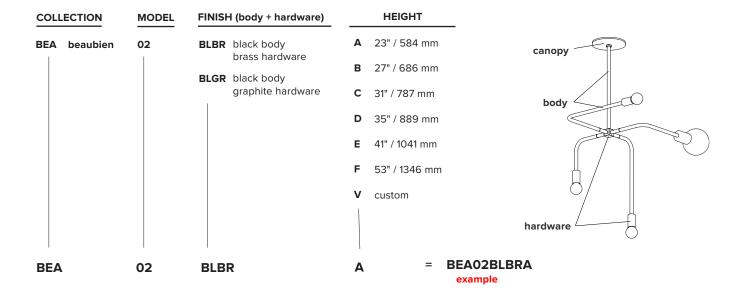

FINISH




CANOPY swivel option for slanted ceiling




lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty



Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty



G60 Ø ±2" / 60 mm

G100 Ø ±4" / 100 mm

 \emptyset ±3" / 80 mm



G80

tube

SPHERES

G50 Ø ±2" / 50 mm



Ø 1" / 27 mm length ± 2" / 60 mm







DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommand conducting your own test before final installation.