# lambert&fils

### **CLIFF SUSPENSION**



type suspension

body: brass (BR) materials

milk glass (G50 / G80) sphere:

hardware: brass

total height 36" 42"

610 mm | 762 mm | 914 mm | 1067 mm | 1372 mm

min. 3.7 lb / 1.7 kg - max. 4.1 lb / 1.9 kg weight (min.)

light bulb LED (included), 1x 4.5W + 4 x 3.5W

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models


certifications 


notes - must be installed by an electrician;

> - additional charges for modifications or for special orders;

lead time between 7-9 weeks;

- dimensions are approximate and may vary slightly.

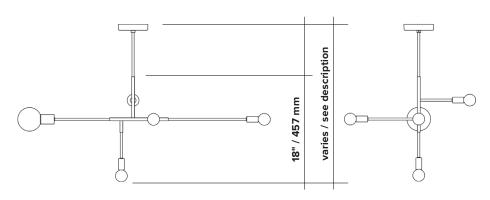




Updated: December 2018

# lambert&fils

### **ORDER GUIDE: SKU**

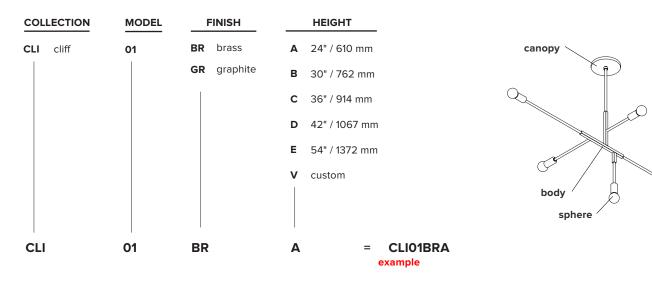

#### **FINISH**




# CANOPY swivel option for slanted ceiling



## lambert&fils

### LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS SPHERES

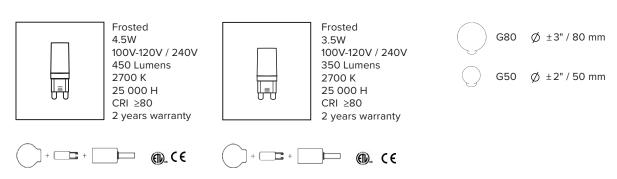

#### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

#### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V**

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

 $<sup>^{*}</sup>$ Other dimmers can yield good results and we recommend conducting your own test before final installation.